

Universal, Unity-Gain BAsE Station and Marine DAB Antenna

DESCRIPTION

- This multi-purpose, omnidirectional, rod-type base station and marine antenna covers the DAB band and can be used in a wide variety of applications.
- The broad-banded $\frac{1}{2} \lambda$ dipole antenna element is sealed in a high-quality glass fibre tube with low wind-load, which will ensure performance undisturbed by corrosive environments.
- Approximately 0 dBd gain.
- Provided with the sturdy “LW” mast mount – a lightweight, multipurpose, epoxy-coated mounting bracket made of non-corrosive aluminium.
- The accompanying U-bolts and fittings are made of stainless steel.
- To be mounted on vertical or horizontal mast tubes, 16 to 54 mm in outer diameter.
- The cable can be led either on the outside or along the inside of the mast tube.
- Large bandwidth with respect to both VSWR and gain.
- All metal parts in the antenna are DC-grounded to reduce the noise caused by atmospherical discharge. Consequently, the antenna shows a DC-short across the coaxial cable.
- The CXL 230-1LW/DAB is a vibration-proof, lightweight, slim-line, corrosion-resistant, modern style base station and marine antenna.



SPECIFICATIONS

Electrical	
Model	CXL 230-1LW/DAB
Frequency	223 - 240 MHz
Antenna Type	Coaxial dipole, broad-banded
Max. Input Power	150 W
Polarisation	Vertical
Pattern Type	Omnidirectional
3 dB Beamwidth, E-Plane	80 °
3 dB Beamwidth, H-Plane	Omnidirectional
Impedance	50 Ω
Gain	0 dBd (2.2 dBi)
VSWR	< 1.5:1
Bandwidth	17 MHz
Antistatic Protection	All metal parts DC-grounded (Connector shows a DC-short)
HCM Code(s)	HCM000ND00, 040DE00


Mechanical	
Connection(s)	N(f)
Materials	Shroud: Polyurethane-coated glass fibre Mounting bracket: Seawater resistant aluminium, epoxy-coated Clamps: Stainless steel
Colour	White (RAL 9003)
Wind Area	0.0172 sq. m / 0.19 sq. ft
Wind Load	22 N (160 km/h)
Height	Approx. 1260 mm / 49.61 in.
Weight	Approx. 0.76 kg / 1.68 lb.
Mounting	On 16 to 54 mm dia. mast tube

Environmental	
Operating temperature range	-30 °C to +70 °C


ORDERING

Model	Product No.
CXL 230-1LW/DAB	110000114



TYPICAL GAIN AND VSWR CURVE

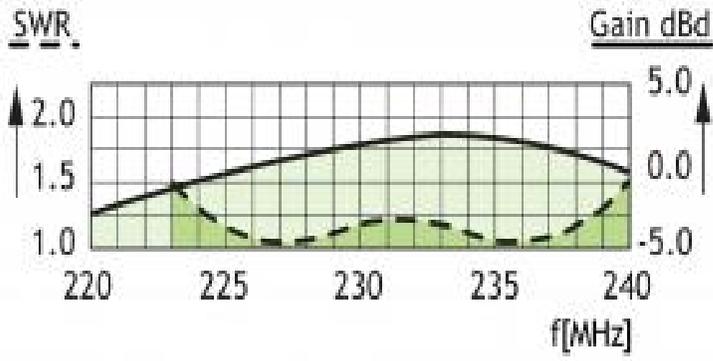

MULTI-PURPOSE MOUNTING BRACKET

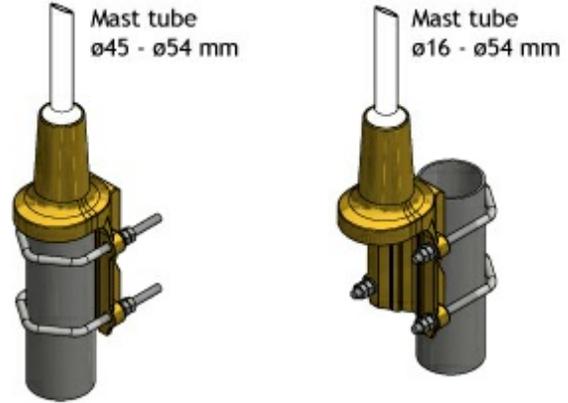

TYPICAL RADIATION PATTERN (E-PLANE)

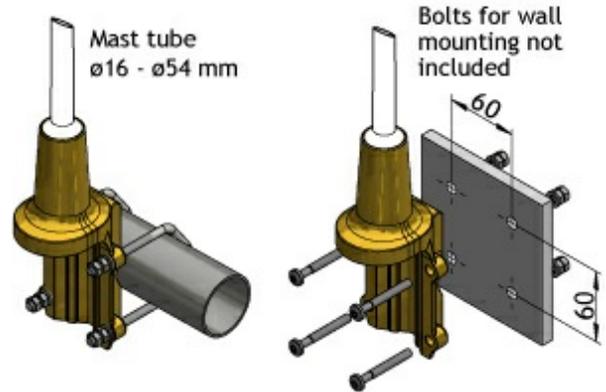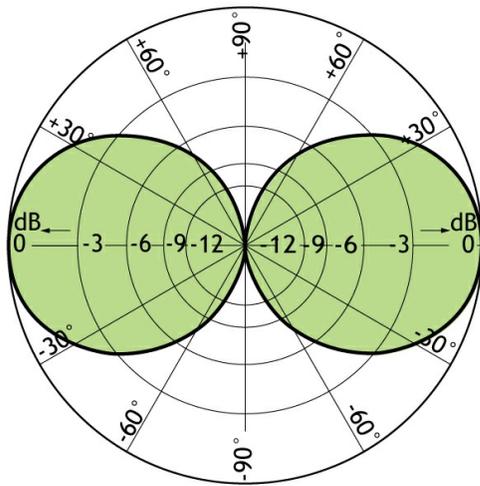

PLEASE NOTE

The antenna is delivered with a DC-connection between the antenna element and the mounting bracket.

TYPICAL RADIATION PATTERN (H-PLANE)

